


PORCELAIN WOOD

Unrivaled strength. Timeless beauty.

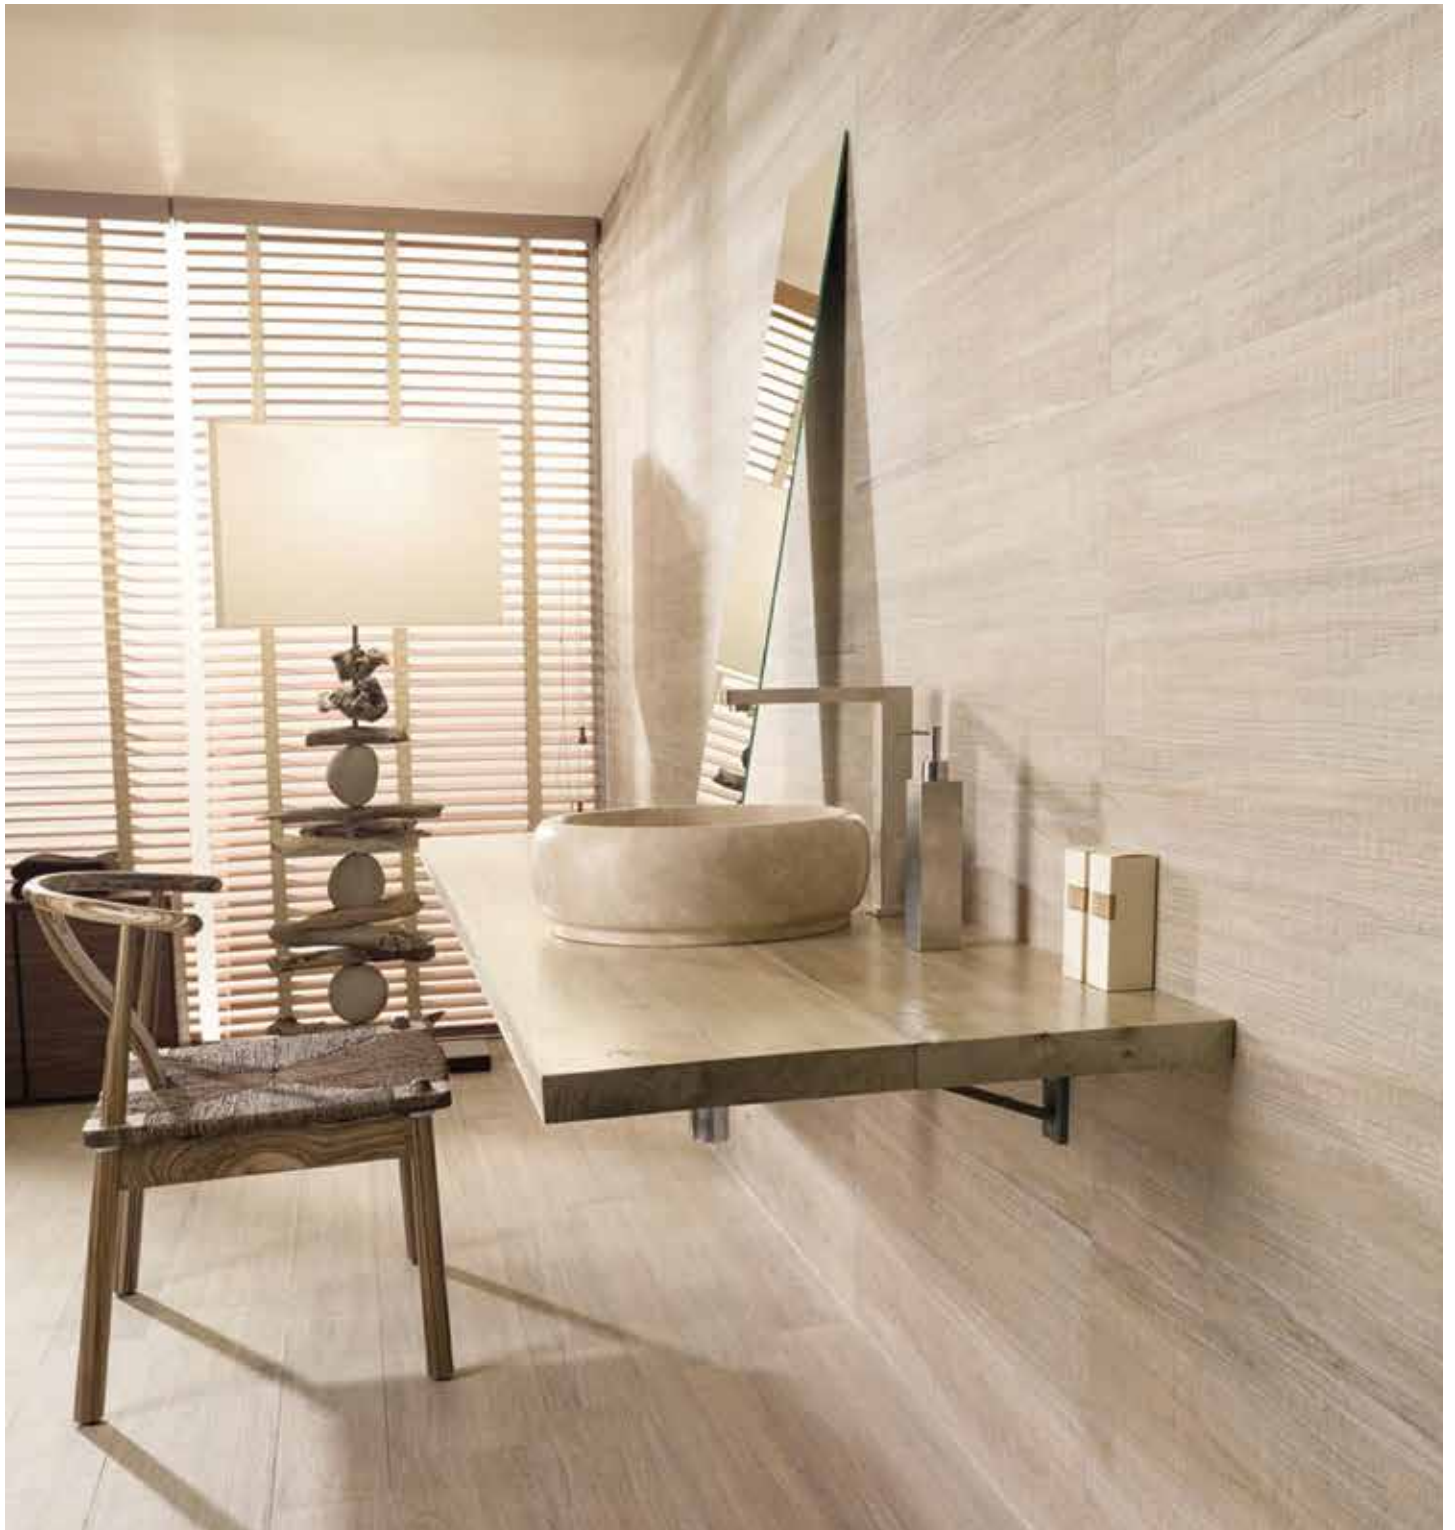

Dalby Textured

A range of minimal, lime-washed wood grains that echo the aesthetic of a beach-side boardwalk, manufactured with a hand-scraped, anti-slip finish

Product displayed is Dalby Textured Hazlenut

PORCELAIN WOOD

Unrivalled strength. Timeless beauty.

The Dalby Textured Range



Dalby Textured Light



Dalby Textured Hazlenut



Dalby Textured Ash





Dalby Textured Coast



Dalby Textured Natural

Dimensions: 14.4 x 89.3cm (5.7 x 35.2 inches)

  11.5mm thickness



Dalby Textured Light



Dalby Textured Hazlenut



Dalby Textured Ash





Dalby Textured Coast



Dalby Textured Natural

Dimensions: 21.8 x 89.3cm (8.6 x 35.2 inches)

  11.5mm thickness

PORCELAIN WOOD

Unrivaled strength. Timeless beauty.

Technical characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm)	11.5	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B la	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	Available on request	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< 9*10 ⁻⁶ /° C	UNE EN ISO 10545 Part 8
Thermic impact resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 9
Cracking resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 11
Frost resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 12
Slip resistance	Class 3 R11	UNE ENV 12633:2003

Chemical resistance		
Domestic cleaning products	Type GA	UNE EN ISO 10545 Part 13
Swimming pool salt	Type GA	
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14

anti-slip  R11

Dedicated Slip Resistance

The Dalby Textured range is specifically designed to provide better safety in areas of pedestrian traffic, where the humidity conditions and slopes are greater than normal. Dalby Textured rates higher than the test results recommended by Regulation UNE-ENV 12633:2003.


Matching With Our Dalby Silk Range

Our Dalby range is unique in our portfolio of products, as it is available in two different finishes; Textured (for a hand-scraped, anti-slip finish) and Silk (offering a smoother and slightly glossier feel). These two ranges can be combined to maintain a consistent appearance across areas that have different requirements. This would allow the running of the same tile inside your house in the Silk finish, through to an exterior balcony or patio in the Textured, anti-slip finish. This is also ideal for bathroom or wetroom areas, where Textured tiles can be applied to the floor, complimented with a Silk finish on the walls.


cut and bevelled skirting tile
9.4 x 44.3 cm / 3.7 x 17.4 inches
Dalby Textured-CR



staircase step
44.3 x 89.3 cm / 17.4 x 35.2 inches
Dalby Textured-CR



step lip
44.3 x 89.3 cm / 17.4 x 35.2 inches
Dalby Textured-CR



The staircase step and gradone can be sold with or without the ribbed notch. Angle is also available.