

# PORCELAIN ~~XX~~ WOOD

Unrivaled strength. Timeless beauty.



## Prescott

A range of distressed, Parisian-inspired whitewashed tones with versatile geometric patterning, designed around a subtle, neutral base of ashes and greys.

Product displayed is Prescott Chequered

# PORCELAIN WOOD

Unrivaled strength. Timeless beauty.

## The Prescott Range



Prescott Light



Prescott Chequered

For the correct installation, it is necessary to overlap the Prescott Chequered tile by 8.5cm approximately, or by multiples of this measurement, without exceeding 25% of the total length of the tile.




Prescott Light Diagonal (Right)



Prescott Light Diagonal (Left)

The Prescott Light 'Diagonal (Right)' and 'Diagonal (Left)' tiles are designed to be used together as herringbone tiles, so please keep in mind that all installation patterns will require both shapes.

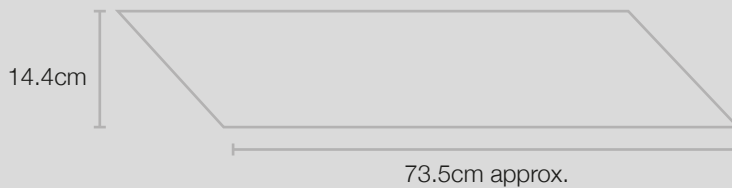

Dimensions: 14.4 x 89.3cm (5.7 x 35.2 inches)



10mm thickness



Prescott Light



Prescott Harlequin - Diamond

For correct installation, it is necessary to turn this tile by 180°.



Prescott Harlequin - Triangle

For the correct installation, it is necessary to overlap Caria by 15cm.

Dimensions: 21.8 x 89.3cm (8.6 x 35.2 inches)



10mm thickness

# PORCELAIN WOOD

Unrivaled strength. Timeless beauty.


Technical characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm)	10	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B la	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	4	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< $9 \cdot 10^{-6} / ^\circ \text{C}$	UNE EN ISO 10545 Part 8
Thermic impact resistance	It stands the test	UNE EN ISO 10545 Part 9
Cracking resistance	It stands the test	UNE EN ISO 10545 Part 11
Frost resistance	It stands the test	UNE EN ISO 10545 Part 12
Slip resistance	Class 1	UNE ENV 12633:2003

Chemical resistance		
Domestic cleaning products	Type GA	
Swimming pool salt	Type GA	UNE EN ISO 10545 Part 13
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14


cut and bevelled skirting tile  
9.4 x 44.3 cm / 3.7 x 17.4 inches  
Whitewashed-R  
G.914




Due to the shape of the herringbone tile, the following installation patterns need both the Prescott Light Diagonal (Left) and Prescott Light Diagonal (Right)

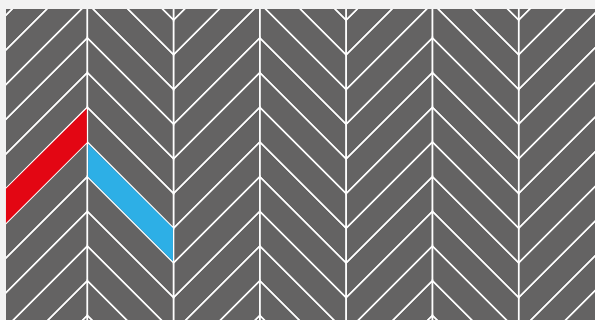

A

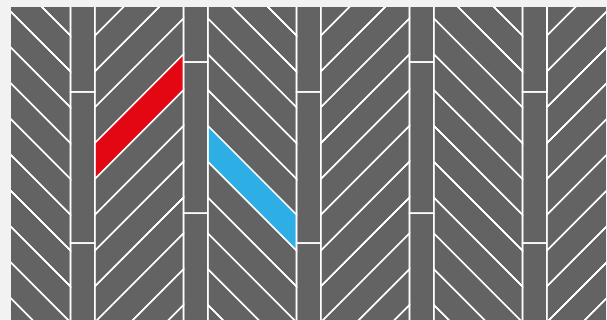

B

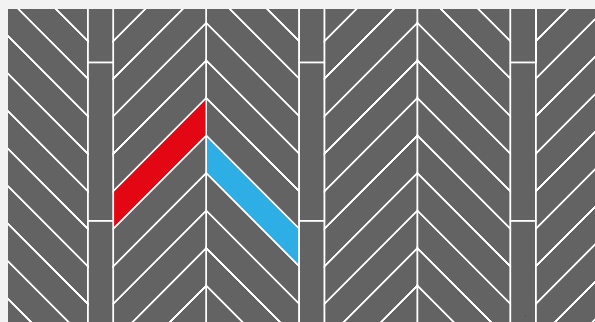

C