


PORCELAIN WOOD

Unrivaled strength. Timeless beauty.

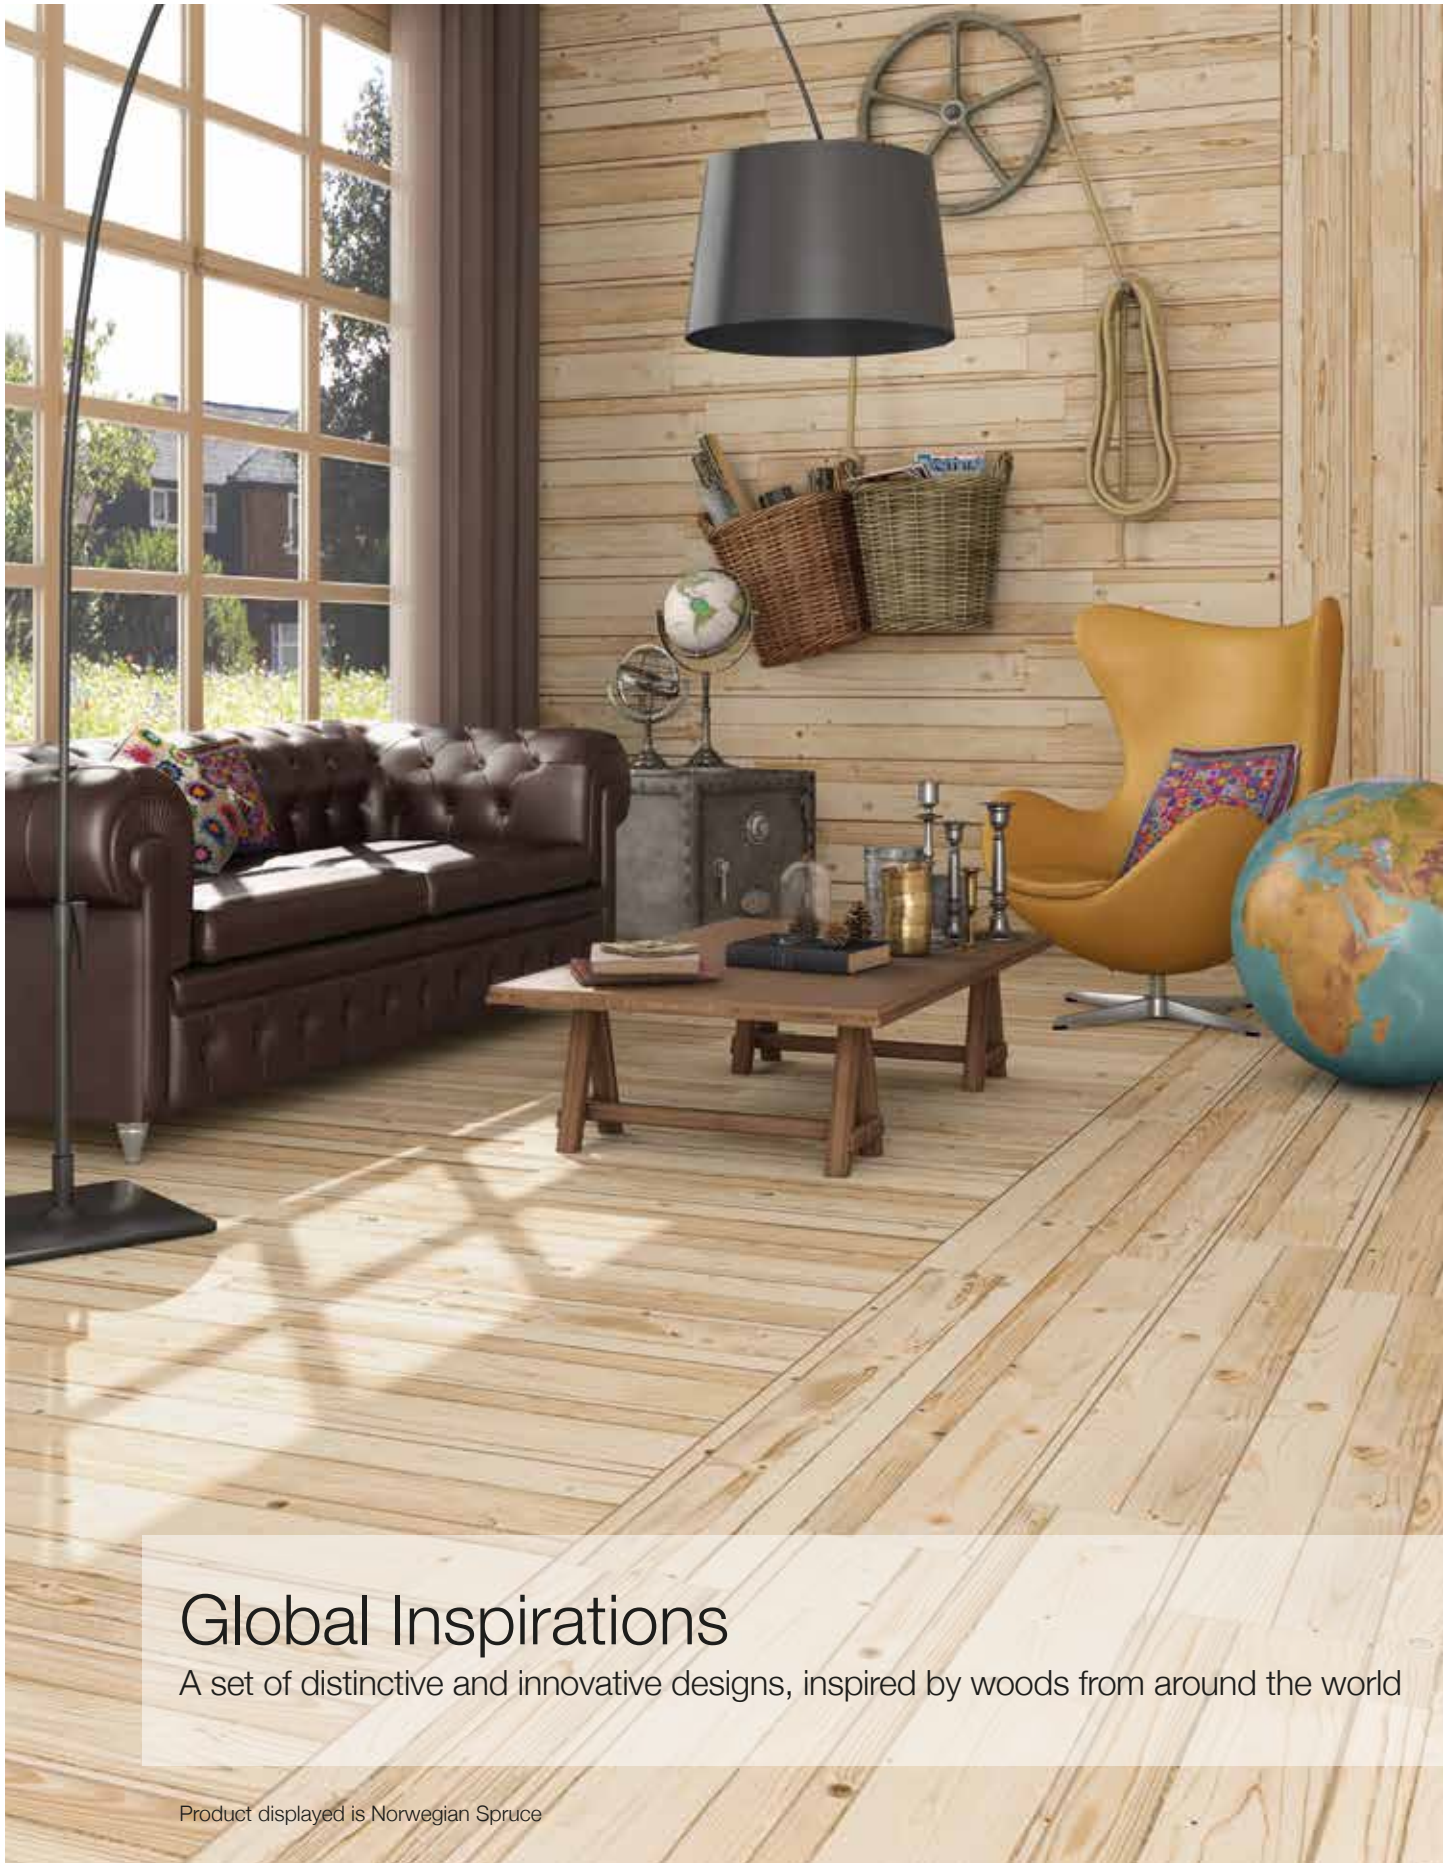

Global Inspirations

A set of distinctive and innovative designs, inspired by woods from around the world

Product displayed is Norwegian Spruce

PORCELAIN WOOD

Unrivaled strength. Timeless beauty.

The Global Inspirations Range



Mexican Chilopsis



Norwegian Spruce



Japanese Carbon



Madagascar Cinnamon



Swiss Alpenrosen



Portuguese Fig

This model has different designs that are combined alternately, coming in the same box.

Dimensions: 19.2 x 119.3cm (7.6 x 47 inches)



11mm thickness



<25%



Honeycombe Mexican Chilopsis



Honeycombe Norwegian Spruce



Honeycombe Japanese Carbon



Honeycombe Madagascar Cinnamon



Honeycombe Swiss Alpenrosen



Mexican Chilopsis
60 x 60cm / 23.6 x 23.6cm

Dimensions: 44.5 x 38cm aprox.



10mm thickness

T: +44 (0) 844 854 3050 E: ask@porcelainwood.com W: www.porcelainwood.com

PORCELAIN WOOD

Unrivalled strength. Timeless beauty.

The Global Inspirations Range - Special Pieces



Diamond Mexican Chilopsis



Diamond Norwegian Spruce



Diamond Japanese Carbon









Diamond Madagascan Cinnamon



Diamond Swiss Alpenrosen

Placement Options




Dimensions: 22 x 38cm aprox.

PORCELAIN WOOD

Unrivaled strength. Timeless beauty.

Technical characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm)	11	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B la	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	4	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< 9*10 ⁻⁶ /° C	UNE EN ISO 10545 Part 8
Thermic impact resistance	It stands the test	UNE EN ISO 10545 Part 9
Cracking resistance	It stands the test	UNE EN ISO 10545 Part 11
Frost resistance	It stands the test	UNE EN ISO 10545 Part 12
Slip resistance	Class 1	UNE ENV 12633:2003
Inclined plane, wearing shoes	R10	DIN 51130
Inclined plane, barefoot	Class A	DIN 51097

Chemical resistance		
Domestic cleaning products	Type GA	UNE EN ISO 10545 Part 13
Swimming pool salt	Type GA	
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14




Interlocked laying
maximum 25%

< 25%


Cut and bevelled skirting tile
9.4 x 59.3 cm / 3.7 x 23.3 inches
Global Inspirations
G.916
9.4 x 60cm / 3.7 x 23.6 inches
Global Inspirations
G.915



Staircase step
60 x 60cm / 23.6 x 23.6 inches
Global Inspirations
G.81
59.3 x 59.3 cm / 23.3 x 23.3 inches
Global Inspirations
G.83



Gradone
60 x 60cm / 23.6 x 23.6 inches
Global Inspirations
G.86
59.3 x 59.3 cm / 23.3 x 23.3 inches
Global Inspirations
G.87



The staircase step and gradone can be sold with or without the ribbed notch. Angle is also available.

Global Inspirations

Cut skirting tile
9.4 x 20cm / 3.7 x 7.9 inches
Global Inspirations
G.23



